

智联城市，布局全球战略

Global strategy,
growing toward the world...

产品和服务网络覆盖东南亚、
中东、非洲等全球100多个国家和地区

100+



巨立电梯股份有限公司（证券简称：巨立股份 证券代码：833481）Joylive Elevator Co., Ltd.

地址：江苏省昆山市巴城镇石牌工业区毛许路322号 | 公司网站：www.joylive.com
电话：0512-57806555 | 传真：0512-57899222 | 全国24小时服务热线：400 884 8881 | 电子邮箱：joylive@joylive.com
A: No. 322, Maoxu Rd., Bacheng, Kunshan, Suzhou City, Jiangsu Province, China | T: +86-512-57806555 | M: info@joylive-lift.com

本印刷品仅作为一般信息之用，本公司保留随时更改产品设计与规格的权利。本印刷品所载信息就产品及其特殊用途之适用性、适销性、品质均不构成任何明示或暗示的担保或承诺，亦不得视作其中产品或服务采购协议的条款，内容仅供参考，如有变动，以最新技术文件为准，恕不另行通知，印刷颜色与实际色彩可能略有差别，以实物为准。

版权所有 202501
Photos and information of products in the catalog are for your reference only and they may not reflect the actual products. Joylive has rights to change products design and specification without prior notice.



巨立电梯官方微信 巨立电梯官方网站 巨立电梯官方抖音



智能乘客电梯

全生命周期管理服务方案

JOYLIFE

Lifecycle management service solution for
Intelligent Passenger Elevator

3100/3200/3300S
3300N/3600

巨立股份 伴你美好生活

JOYLIFE – Your friend of wonderful life



Joylife 商务住宅电梯方案

Commercial & Residential Passenger Elevator

满足全球商务住宅市场配套

覆盖刚需商务居所市场

提供建筑辅助设计

户型与客流规划

促进建筑增值

Meet global commercial and residential market requirements.

Covering strong-demand business housing market.

Provide architectural assistance design.

House type and passenger flow planning.

Promote building value-added.

ELEVATOR IoT PLATFORM 电梯物联网服务平台

巨立云 - 大数据安全管理系统,
为电梯运行提供数字化服务

Joycloud - Big data security management system,
Providing digital services for elevator running



动态监测 Active diagnosis

对电梯的运行实施动态监测。
Active diagnosis of elevator running in time.



网格救援 Grid-layout Rescue

电梯故障时主动提示并进行网络定位,
监控中心主动派遣专业技术工程师赶赴维修。
When elevator breaks down, the system prompts and
makes accurate positioning, monitoring center will
send engineer to site for rescue.



远程监控 Remote monitoring

电梯使用状态检测, 通过 AI 摄像头及各种传感器,
实现困人检测、气罐检测、电瓶车检测等实时监控,
及时发现问题, 高效实时管控电梯本体安全。
Elevator status detection can be realized through AI
cameras and various sensors, enabling real-time
monitoring of trapped persons, gas cylinders, electric
bikes, etc., to promptly identify issues and efficiently
manage elevator safety in real time.



在线维保 Online monitoring

自动生成电梯专属健康档案和维保诊断报告, 通过 AI 比
对技术, 对维保工作进行判断, 从而提高维保质量, 达到
优质维保; 预测保养时间, 提前制定保养计划并自动推送。
Automatically generate elevator-specific health records and
maintenance diagnosis reports, use AI comparison
technology to judge maintenance work, thereby improving
maintenance quality and achieving high-quality maintenance;
predict maintenance time, make maintenance plans in
advance and push them automatically.



在线安装 Online installation

从电梯出厂到交付使用, 安装过程全监控。
From the elevator delivery to the client using,
the whole installation process is fully monitored.



人机互动 Interactive system

巨立云可实现智能手机与电梯语音、视频等
多媒体互动体验。
Joycloud Experience of interactive voice and
video between smart phone and elevator.



扫描二维码

下载巨立云手机客户端

Scan QR code to download
JoyCloud Apps



Joycloud Android



Joycloud ios

INNOVATIVE TECHNOLOGY & SECURITY ASSURANCE

创新技术 安全保障



智能控制系统

智能一体化控制驱动器，精确控制位置信息，电梯楼层更加安全准确、平稳，有效提高运行效率和舒适度。

INTELLIGENT CONTROL SYSTEM

Intelligent integration control drive and precisely control position data to make elevator leveling safer, more stable and accurate, effectively improving running efficiency and comfort.



厅/轿门系统

永磁电机，效率高，转动力矩大，低耗节能；调速舒适感强，实现力矩、位置、速度的全闭环控制

DOOR MECHANISM

High efficiency permanent magnet motor, large turning torque and low energy consumption; comfortable speed control to achieve closed loop control of torque, position and speed.




减震降噪系统


多重减震措施，减弱震动传导，配置隔音、降噪措施，增强乘坐舒适度，提高用户体验。

SHOCK ABSORPTION AND NOISE REDUCTION SYSTEM

Multiple shock absorption measures to reduce vibration transmission. Configure sound insulation and noise reduction measures to enhance riding comfort and improve user experience.

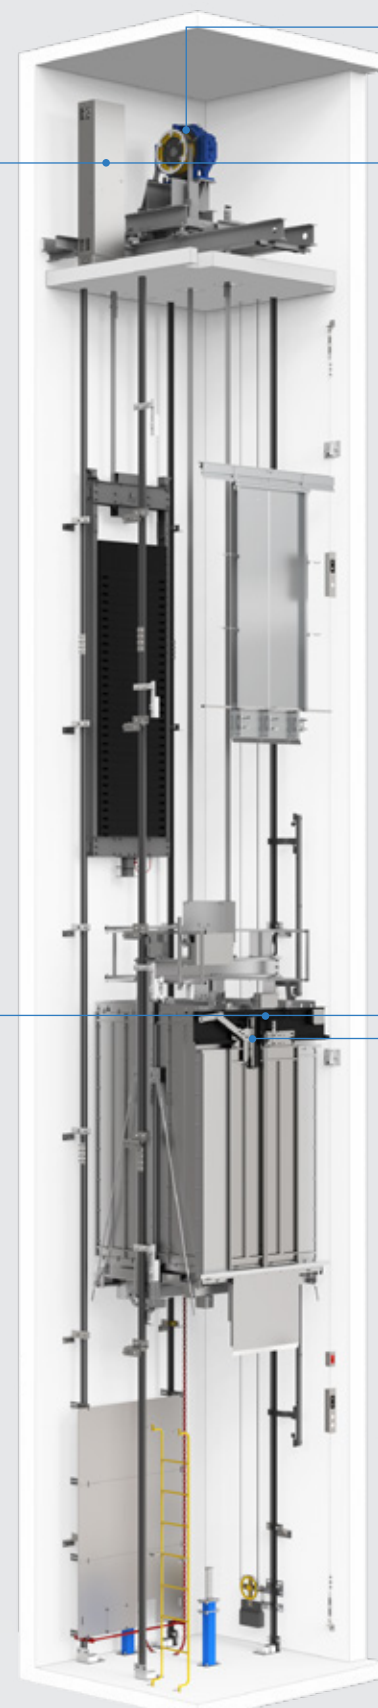


小机房 SMR

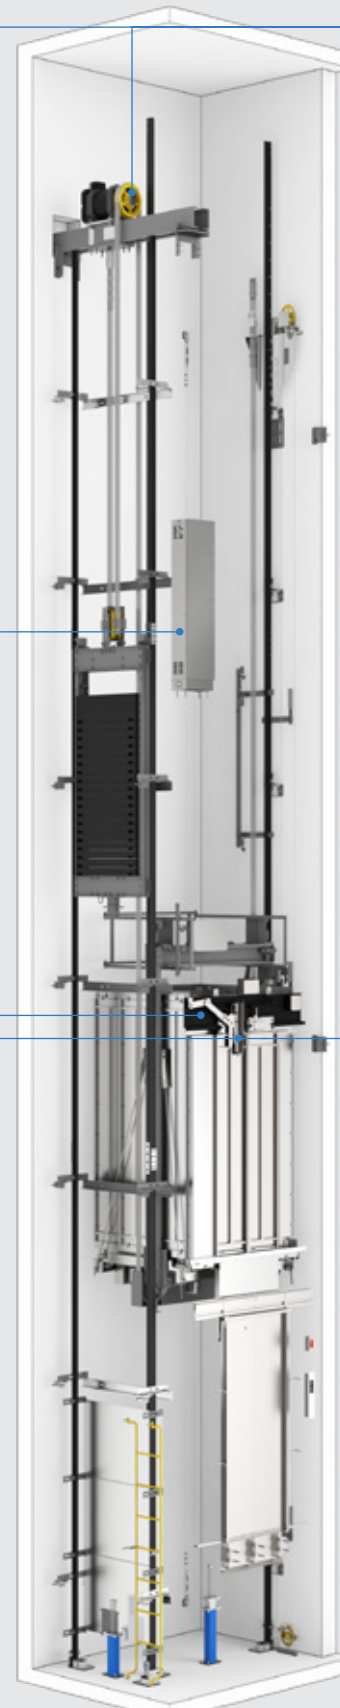

无机房 MRL

SELF-DETECTION OF TRACTION MOTOR'S BRAKE FORCE

Regularly detect brake force of traction motor, verify its reliability and avoid elevator safety problems caused by brake failure to realize elevator safety self-diagnosis.

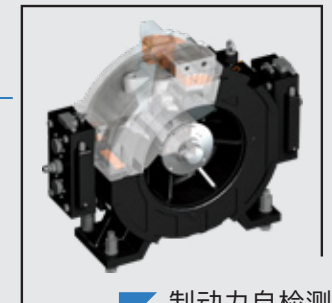


制动力自检测

定时检测主机制动能力，验证其可靠性，避免因抱闸失效而导致的电梯安全问题，实现电梯健康安全自诊断。

ISO25745/VDI4707 CLASS-A, HIGHEST ENERGY SAVING CERTIFICATE

Standby power consumption is less than 50W, fast calling response to reduce the standby power consumption by 50%.

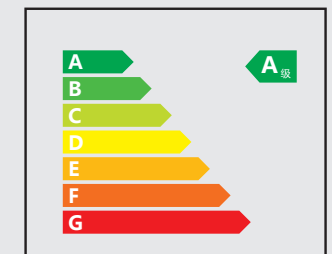

通过ISO25745/VDI4707最高A级节能认证

待机功耗低于50W，呼梯响应迅速，减少50%的待机能耗。

ANTI-PUSH DOOR OPENING DEVICE

Active door lock to prevent safety problems such as door slamming or forcible opening.



开门限制装置

主动将轿门锁紧，避免强行扒门等安全问题。

MODULAR ASSEMBLY

Maximum modular assembly before leaving the factory and strict quality inspection to improve quality and efficiency of on-site installation.



模块化组装

最大模块化组装出厂，严格质量检验，极大提高现场安装质量与效率。

INTEGRATED DESIGN, QUALITY UPGRADE


整合设计 品质升级

设计迭代 Design Iteration



采用曲面屏概念设计，全新抗指纹磨砂不锈钢作为基础材料，在保证美观的同时，解决了电梯安装及使用过程中外呼表面油印、污迹难以清理的问题。

HOP Design
Curved screen design with anti-fingerprint frosted stainless steel as faceplate, beautiful looking and easy to clean up.

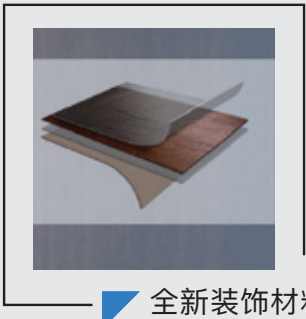

热熔式化妆钢板采用热熔方式进行贴膜，黏合力更均匀，表面保护层抗拉伸效果更好，从而更好的避免了折弯开裂的问题。同时更加多样化的花纹和肌理，可以让设计人员更好的表达产品装饰设计的诉求。

New Decoration Material
Laminated hot-melt decoration steel plate, more uniform adhesion and better tensile resistance effect on protective layer, to avoid the problem of bending and cracking. More diversified patterns and textures to choose.




操纵箱微光按钮的使用，可以使乘客更快速的看清楼层数字按钮，便于乘客使用，提升乘客的乘坐体验。

Low-light Button (Optional)
Floor number buttons can be recognized more quickly in absence of light, convenient for passengers to operate and enhance riding experience.

微光按钮（选配）

精算验证 Actuarial Validation

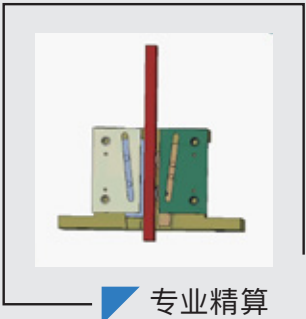

通过多维度严格的计算过程进行设计计算，运用三维设计软件，在设计各类受力部件与运动部件时，通过有限元分析进行受力的分析与验证。

Professional Actuarial
Design calculations are carried out through strict and multi-dimensional calculation process, 3D design software is used to analyze and verify the force through finite element analysis when designing various force-bearing parts and moving parts to ensure products quality before production.



巨立电梯CNAS国家认可实验室共获得29项试验项目的认可，所出具的认可试验的报告是完全按照国家认可标准进行试验的。产品设计完成后，实验室进行试验验证，出具试验报告。

CNAS Laboratory Verification
Joylive Elevator CNAS national accredited laboratory has been accredited for 29 test items in total, and the test report issued is completely tested in accordance with national standards. When product design is completed, the laboratory conducts test verification and issues a test report.



模块化安装

项目现场仅需进行井道件的安装及各部件模块化组装即可便捷完成电梯的安装。

Modular Installation

Project site only needs modular assembly of shaft parts and components to complete elevator installation conveniently.



安装节点控制

通过巨立云，实现各类安装节点的控制，把控安装全过程。协助管理者进行安装过程管控。

Installation Process Control

Through Joycloud platform, each installation node is in control, and the entire process is controlled. Assist manager to control the whole installation process.



人员管理

特有的人员管理模块，可以协调安装人员工作，提升安装单位的运营效率。

Personnel Management

Unique personnel management module can coordinate work of installers and improve operating efficiency of installation company.

INTEGRATED DESIGN, QUALITY UPGRADE

整合设计 品质升级



能量回馈系统*

凭借高效的能量再生技术将电梯运行过程中产生的再生能量回收至电网，重新利用，减少能耗。

Energy Regeneration Technology

With efficient energy regeneration technology, energy generated during elevator operation is recovered to electricity grid, reuse, and reduce energy consumption.

安全卫士 Security Guard




电动车禁入电梯管控系统*

电动车禁入电梯管控系统前端设备嵌入电动车识别算法，对电动车检测分析，实现对电动车分析识别，实时预警周界区域内电动车闯入事件。当有电动车进入电梯监测范围内可对其自动识别，抓拍告警图片并现场联动语音告警，同时输出开关门信号到电梯，控制电梯停止运行；亦可将抓拍的告警图像传输到管理中心，在管理中心输出报警信号。

Electric Bike Prohibited Control System

It is dangerous and forbidden for an electric bike to enter elevator car, collision may cause fire in battery. When an electric bike enters monitoring range, the system can automatically recognize that, capture photos and make an on-site voice alarm, and at the same time it will stop elevator running; and send an alarm signal and captured photos to the management center.

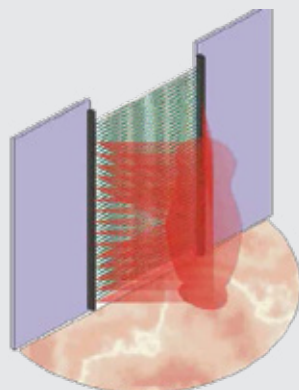

3D光幕保护系统*

3D检测模块根据热释电红外传感器(PIR)对移动红外辐射的人体进行检测，实现对电梯门区域无盲区三维检测和趋势检测，高可靠、高灵敏、响应时间短，更加精确的检测扫描，从而给乘梯人员带来更加全方位的安全保障。

3D Light Curtain Protection System

The 3D detection module detects human body with mobile infrared radiation according to the pyroelectric infrared sensor (PIR) Detection, to achieve three-dimensional detection and trend detection without blind areas in elevator door area, high reliability, high sensitivity, short-time response, and more accurate detection and scanning, which brings more comprehensive security guarantee.


健康卫士 Health Guard

换气与净化系统可减少轿厢内病菌的残留，达到抑菌、杀菌的效果；智能化的终端呼梯，可使乘梯人员不必接触电梯部件从而减少接触病菌的可能性；无接触按钮、语音呼梯与AI智能人脸识别系统更体现了智能化电梯的优势，进一步保障乘梯人员的健康安全。

The ventilation and purification system can reduce the residual bacteria in the car and achieve the effect of antibacterial and sterilization; Terminal call elevator can make passengers no need to touch elevator parts and reduce the exposure to germs; touch-less buttons, voice call elevators and AI intelligent face recognition system further reflect intelligence advantages of elevators, to further protect health and safety of passengers.

轿厢空气净化器系统*

Car air purifier system

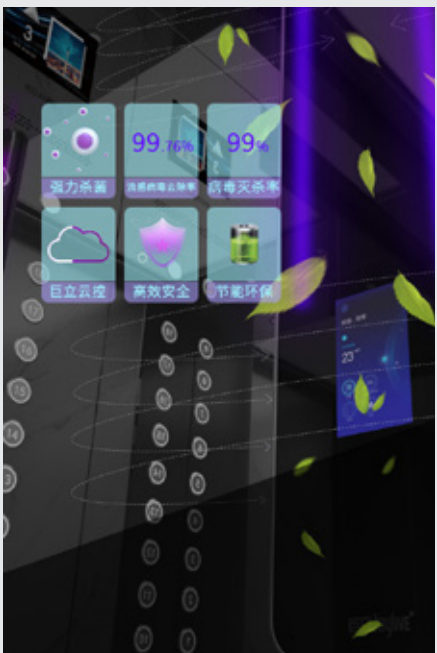

智能化终端呼梯系统*

Intelligent terminal call system



无接触、语音呼梯*

Touch-less button, call elevator by voice



注：*为选配功能

Note: Above are optional functions

DECORATION DESIGN

装潢设计



轿厢 G5347 (标配) Standard Cabin




吊顶 Ceiling

标配 Standard



喷塑钢板(玛瑙灰)
Powder coating plate
(Agate grey)

可选 Optional



喷塑钢板 (灰白色)
Powder coating plate
(Grey white)



G1113



G1112



G1114




轿壁 Car wall

标配 Standard



喷塑钢板(玛瑙灰)
Powder coating plate
(Agate grey)

可选 Optional



喷塑钢板 (灰白色)
Powder coating plate
(Grey white)



喷塑钢板 (淡绿色)
Powder coating plate
(Pale green)



喷塑钢板 (淡蓝色)
Powder coating plate
(Pale blue)



地板 Floor

标配 Standard



石塑地板(爵士白
G3386)
SPC (White G3386)

可选 Optional



石塑地板(浅灰洞石
G3387)
SPC (Light grey
travertine G3387)



石塑地板(深灰洞石
G3388)
SPC (Dark grey
travertine G3388)

备注:

本手册所展示的轿厢及选项配置仅供参考, 所示样品与实物的色彩和材质可能会有偏差, 以实物为准。

Note:

The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.



轿厢 G5348 (选配) Optional Cabin




吊顶 Ceiling

标配 Standard



喷塑钢板(玛瑙灰)
Powder coating plate
(Agate grey)

可选 Optional



喷塑钢板 (灰白色)
Powder coating plate
(Grey white)



G1112



G1113



G1114



侧壁/后边壁 Side wall Back side wall

标配 Standard



发纹不锈钢443
Hairline St./St.




后中壁 Back middle wall

标配 Standard



发纹不锈钢443
Hairline St./St.

可选 Optional



镜面不锈钢
Mirror St./St.



地板 Floor

标配 Standard



石塑地板(爵士白
G3386)
SPC (White G3386)

可选 Optional



石塑地板(浅灰洞石
G3387)
SPC (Light grey
travertine G3387)



石塑地板(深灰洞石
G3388)
SPC (Dark grey
travertine G3388)

备注:

本手册所展示的轿厢及选项配置仅供参考, 所示样品与实物的色彩和材质可能会有偏差, 以实物为准。

Note:

The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.

SIMPLE SERIES
简约系列

轿厢 G5349 (选配) Optional Cabin



地板
Floor

- | | | |
|--------------------------------------|---|--|
| 标配 Standard | 可选 Optional | |
| | | |
| 石塑地板(爵士白 G3386)
SPC (White G3386) | 石塑地板(浅灰洞石 G3387)
SPC (Light grey travertine G3387) | 石塑地板(深灰洞石 G3388)
SPC (Dark grey travertine G3388) |

吊顶 Ceiling

- | | |
|------------------------------|-------------|
| 标配 Standard | 可选 Optional |
| | |
| 发纹不锈钢443
Hairline St./St. | G1112 |
| | |
| G1114 | G1113 |

侧壁 Side wall

- | | |
|--|---|
| 标配 Standard | 可选 Optional |
| | |
| 喷塑钢板 (淡绿色)
Powder coating plate
(Pale green) | 喷塑钢板(玛瑙灰)
Powder coating plate
(Agate grey) |
| | |
| 喷塑钢板 (灰白色)
Powder coating plate
(Grey white) | 喷塑钢板 (淡蓝色)
Powder coating plate
(Pale blue) |
| | |
| 喷塑钢板 (太阳黄)
Powder coating plate
(Sun yellow) | 喷塑钢板 (淡橙)
Powder coating plate
(Light orange) |

后边壁 Back side wall


- | |
|------------------------------|
| 标配 Standard |
| |
| 发纹不锈钢443
Hairline St./St. |

后中壁 Back middle wall

- | | |
|------------------------------|-------------------------|
| 标配 Standard | 可选 Optional |
| | |
| 发纹不锈钢443
Hairline St./St. | 镜面不锈钢
Mirror St./St. |

SIMPLE SERIES
简约系列

轿厢 G5281 (选配) Optional Cabin

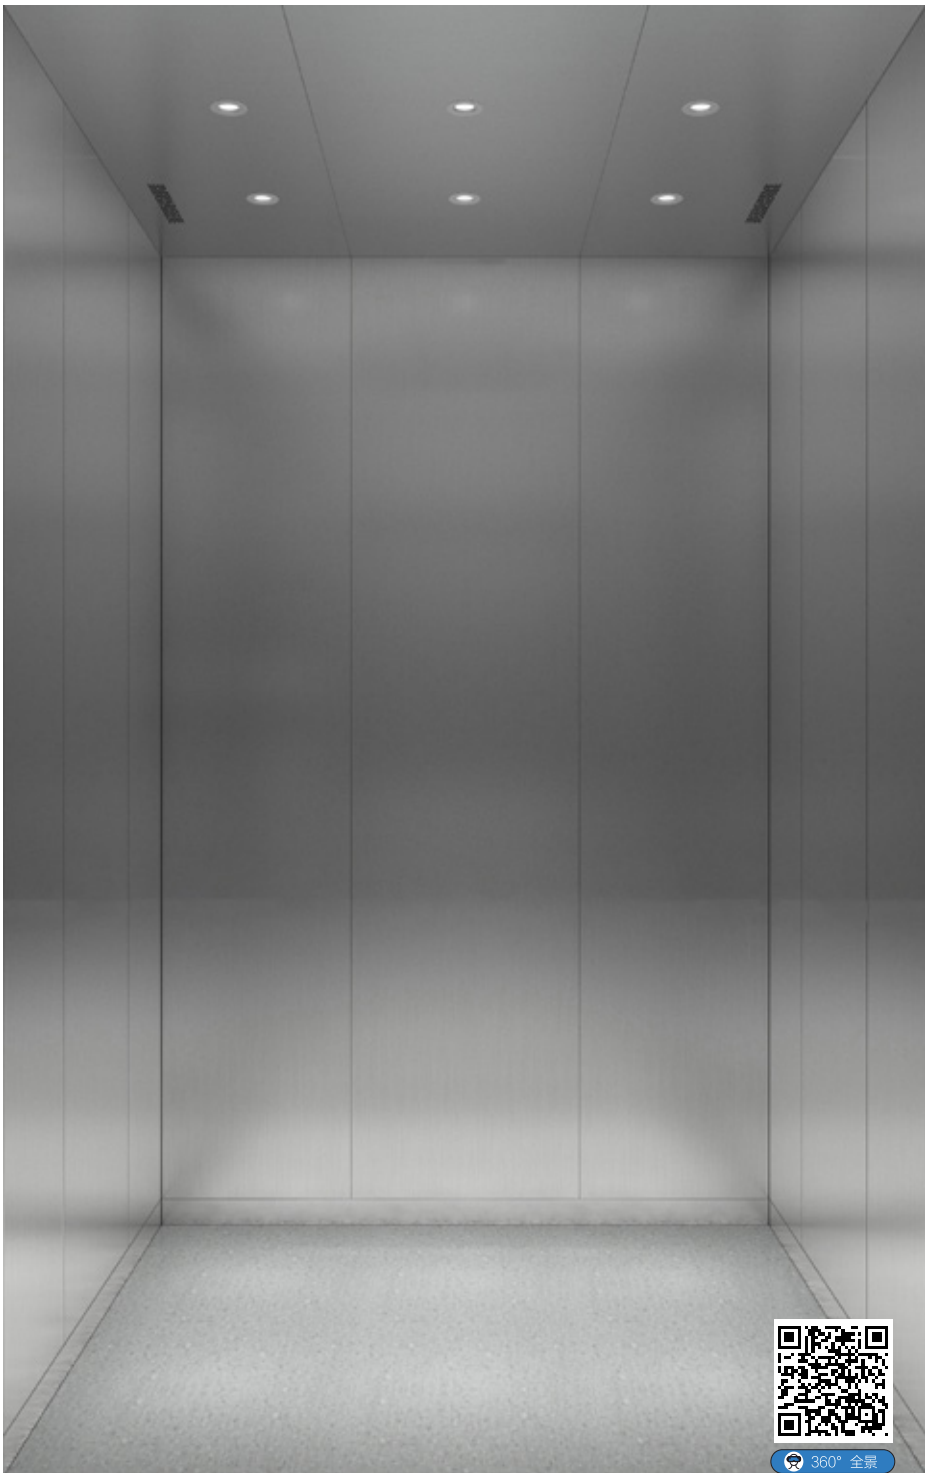

吊顶 Ceiling

- | | |
|------------------------------|--|
| 标配 Standard | 可选 Optional |
| | |
| 发纹不锈钢443
Hairline St./St. | 喷塑钢板(玛瑙灰)
Powder coating plate
(Agate grey) |
| | |
| | 喷塑钢板 (灰白色)
Powder coating plate
(Grey white) |
| | |
| G1089 | G1090 |

侧壁/后边壁 Side wall
Back side wall

- | |
|------------------------------|
| 标配 Standard |
| |
| 发纹不锈钢443
Hairline St./St. |

后中壁 Back middle wall

- | | |
|------------------------------|-------------------------|
| 标配 Standard | 可选 Optional |
| | |
| 发纹不锈钢443
Hairline St./St. | 镜面不锈钢
Mirror St./St. |

地板 Floor

- | | |
|-------------|-------------|
| 标配 Standard | 可选 Optional |
| | |
| PVC G3121 | PVC G3122 |

备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。



Note:
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.

SIMPLE SERIES
简约系列

轿厢 G5280 (选配) Optional Cabin




吊顶 Ceiling

- | 标配 Standard | 可选 Optional |
|--|---|
| 
发纹不锈钢304
Hairline St./St. | 
喷塑钢板(玛瑙灰)
Powder coating plate
(Agate grey) |
| | 
喷塑钢板 (灰白色)
Powder coating plate
(Grey white) |
| 
G1090 | 
G1089 |

侧壁/后边壁 Side wall
Back side wall

- | 标配 Standard |
|--|
| 
发纹不锈钢304
Hairline St./St. |

后中壁 Back middle wall

- | 标配 Standard | 可选 Optional |
|--|--|
| 
发纹不锈钢304
Hairline St./St. | 
镜面不锈钢
Mirror St./St. |

地板 Floor

- | 标配 Standard | 可选 Optional |
|---|--|
| 
PVC G3121 | 
PVC G3122 |

备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。



Note:
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.

SIMPLE SERIES
简约系列


轿厢 G5288 (选配) Optional Cabin



吊顶 Ceiling

- | 标配 Standard | 可选 Optional |
|---|---|
| 
发纹不锈钢304
Hairline St./St. | 
喷塑钢板(玛瑙灰)
Powder coating plate
(Agate grey) |
| | 
喷塑钢板 (灰白色)
Powder coating plate
(Grey white) |
| 
G1090 | 
G1089 |


侧壁/后边壁 Side wall
Back side wall

- | 标配 Standard | 可选 Optional |
|---|---|
| 
化妆钢板 G4441
Decorating plate | 
化妆钢板 G4445
Decorating plate |
| | 
化妆钢板 G4450
Decorating plate |

后中壁 Back middle wall

- | 标配 Standard | 可选 Optional |
|---|--|
| 
发纹不锈钢304
Hairline St./St. | 
镜面不锈钢
Mirror St./St. |

地板 Floor

- | 标配 Standard | 可选 Optional |
|--|--|
| 
PVC G3121 | 
PVC G3122 |

备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。

Note:
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.





CLASSIC SERIES

时尚系列


 轿厢 G5350 (选配) Optional Cabin



 吊顶 Ceiling

标配 Standard	可选 Optional
	
铝合金边框(星空银) Aluminum alloy frame (Starry Sky Silver)	铝合金边框(香槟金) Aluminum alloy frame (Champagne gold)
	
	铝合金边框(墨韵黑) Aluminum alloy frame (Ink black)
	
G1115	G1116
	
	G1117


 侧中壁 Side middle wall

标配 Standard	可选 Optional
	
发纹不锈钢443 Hairline St./St.	发纹不锈钢304 Hairline St./St.
	
	镜面不锈钢 Mirror St./St.

 侧边/后边壁 Side wall / Back side wall

标配 Standard	可选 Optional
	
发纹不锈钢443 Hairline St./St.	发纹不锈钢304 Hairline St./St.

 后中壁 Back middle wall

标配 Standard	可选 Optional
	
发纹不锈钢443 Hairline St./St.	发纹不锈钢304 Hairline St./St.
	
	镜面不锈钢 Mirror St./St.

 地板 Floor

标配 Standard	可选 Optional
	
石塑地板 G3386 SPC	石塑地板 G3387 SPC
	
	石塑地板 G3388 SPC
	
	大理石 G3310 Marble
	
	大理石 G3313 Marble
	
	大理石 G3317 Marble
	
	拼花大理石 FT-01 Marble Mosaic
	
	拼花大理石 FT-03 Marble Mosaic
	
	拼花大理石 FT-06 Marble Mosaic

备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。

Note：
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.

CLASSIC SERIES

时尚系列

轿厢 G5351 (选配) Optional Cabin



吊顶 Ceiling

标配 Standard	可选 Optional
铝合金边框(香槟金) Aluminum alloy frame (Champagne gold)	铝合金边框(星空银) Aluminum alloy frame (Starry Sky Silver)
	铝合金边框(墨韵黑) Aluminum alloy frame (Ink black)
G1116	G1115
	G1117

侧中壁 Side middle wall

标配 Standard	可选 Optional
橡木 Oak	镜面不锈钢 Mirror St./St.
	更多可选材料见 侧边/后边壁

侧边/后边壁 Side wall / Back side wall

标配 Standard	可选 Optional				
橡木 Oak	黑胡桃 Black walnut	灰铁木 Grey ironwood	深灰磨砂 Dark grey frosted	暖黄 Warm yellow	乳白 Milky white
	香槟金 Champagne gold	羊绒灰 Cashmere grey	橄榄绿 Olive green	灰短拉丝 Grey short hairline	栗棕 Chestnut brown
墨黑 Ink black	香槟 Champagne	黄岩 Yellow stone			

后中壁 Back middle wall

标配 Standard	可选 Optional
橡木 Oak	镜面不锈钢 Mirror St./St.
	更多可选材料见 侧边/后边壁

地板 Floor

标配 Standard	可选 Optional				
石塑地板 G3386 SPC	石塑地板 G3387 SPC	石塑地板 G3388 SPC	大理石 G3310 Marble	大理石 G3313 Marble	大理石 G3317 Marble
	拼花大理石 FT-01 Marble Mosaic	拼花大理石 FT-03 Marble Mosaic	拼花大理石 FT-06 Marble Mosaic		

备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。







Note：
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.

CLASSIC SERIES
时尚系列

轿厢 G5352 (选配) Optional Cabin










吊顶 Ceiling

标配 Standard	可选 Optional
 铝合金边框(香槟金) Aluminum alloy frame (Champagne gold)	 铝合金边框(星空银) Aluminum alloy frame (Starry Sky Silver)
 G1117	 铝合金边框(墨韵黑) Aluminum alloy frame (Ink black)
 G1115	 G1116
 G1112	 喷塑钢板(玛瑙灰) Powder coating plate (Agate grey)
 G1113	 喷塑钢板(灰白色) Powder coating plate (Grey white)
 G1114	 发纹不锈钢443 Hairline St./St.


备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。

Note：
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.


侧边/后边壁 Side wall / Back side wall

标配 Standard	可选 Optional					
 橡木 Oak	 黑胡桃 Black walnut	 灰铁木 Grey ironwood	 深灰磨砂 Dark grey frosted	 暖黄 Warm yellow	 乳白 Milky white	 香槟金 Champagne gold
	 羊绒灰 Cashmere grey	 橄榄绿 Olive green	 灰短拉丝 Grey short hairline	 栗棕 Chestnut brown	 墨黑 Ink black	 香槟 Champagne
	 黄岩 Yellow stone	 淡绿色 Pale green	 玛瑙灰 Agate grey	 灰白色 Grey white	 淡蓝色 Pale blue	 太阳黄 Sun yellow
	 淡橙 Light orange	 发纹不锈钢443 Hairline St./St.	 发纹不锈钢304 Hairline St./St.	 磨砂不锈钢 Frosted St./St.		



侧中壁 Side middle wall

标配 Standard	可选 Optional	
 淡蓝色 Pale blue	 镜面不锈钢 Mirror St./St.	更多可选材料见 侧边/后边壁

后中壁 Back middle wall

标配 Standard	可选 Optional	
 橡木 Oak	 镜面不锈钢 Mirror St./St.	更多可选材料见 侧边/后边壁

地板 Floor

标配 Standard	可选 Optional				
 石塑地板 G3386 SPC	 石塑地板 G3387 SPC	 石塑地板 G3388 SPC	 大理石 G3310 Marble	 大理石 G3313 Marble	 大理石 G3317 Marble
	 拼花大理石 FT-01 Marble Mosaic	 拼花大理石 FT-03 Marble Mosaic	 拼花大理石 FT-06 Marble Mosaic		

SIGNAL FIXTURES

人机交互系统

标配操纵箱组合 COP & HOP

COP

CE01

标配，分体嵌入式，发纹不锈钢+有机玻璃，白色段码竖显。

面板材质：发纹不锈钢、镜面不锈钢

面板颜色：钛金、玫瑰金

Standard, split embedded, hairline St./St.+plexiglass, white segment display.

Panel material: hairline St./St., mirror St./St.

Panel color: titanium and rose gold.

HOP

HW01

标配，壁挂式，发纹不锈钢+有机玻璃，白色段码竖显。

Standard, wall-hanging panel, hairline St./St.+plexiglass, white segment display.

消防盒

Fire emergency box

FW01

壁挂式

Wall-hanging

残障操纵箱

Handicapped COP

CD01

嵌入式

Embedded

选配

Optional

选配操纵箱组合 COP & HOP

COP

G2113

选配，分体嵌入式，白色段码竖显，可选橙色点阵竖显。

面板材质：发纹不锈钢、镜面不锈钢

面板颜色：钛金、玫瑰金

Optional,split embedded, white segment,optional orange dot matrix display .

Panel material: hairline St./St., mirror St./St.

Panel color: titanium and rose gold.

HOP

G2253

选配，壁挂式，白色段码竖显，磨砂不锈钢，可选发纹不锈钢。若选发纹不锈钢时，可选颜色钛金、玫瑰金。

Optional, wall-hanging panel, white segment display, frosted St./St., optional hairline St./St. Optional Titanium and rose gold when choosing hairline St./St.

G2209

选配，嵌入式，白色段码竖显，可选橙色点阵竖显。

面板材质：发纹不锈钢、镜面不锈钢。

面板颜色：钛金、玫瑰金。

Optional, embedded, white segment display,optional orange dot matrix display .

Panel material: hairline St./St., mirror St./St.

Panel color: titanium and rose gold.

选配操纵箱组合 COP & HOP

COP

G2116

选配，一体嵌入式，白色段码显示，可选橙色点阵横显或竖显和7寸真彩横显图片机。

面板材质：发纹不锈钢、镜面不锈钢和磨砂不锈钢

面板颜色：黑钛金、钛金、玫瑰金

Optional, integrated embedded, white segment , optional orange dot matrix display and 7 inch multi-media LCD.

Panel material: hairline St./St., mirror St./St. and frosted St./St.

Panel color: black titanium, titanium and rose gold.

HOP

G2245

选配，壁挂式，白色段码显示，磨砂不锈钢，可选发纹不锈钢。若选发纹不锈钢时，可选颜色钛金、玫瑰金。

Optional, wall-hanging panel, white segment display, frosted St./St., optional hairline St./St. Optional Titanium and rose gold when choosing hairline St./St.

G2209

选配，嵌入式，白色段码竖显，可选橙色点阵竖显。

面板材质：发纹不锈钢、镜面不锈钢。

面板颜色：钛金、玫瑰金。

Optional, embedded , frosted St./St.,white segment or orange dot matrix display.

Panel material: hairline St./St., mirror St./St.

Panel color: titanium and rose gold.

消防盒

Fire emergency box

G2273

壁挂式

Wall-hanging

G2220

嵌入式

Embedded

说明：

1、消防盒安装方式与选用外召盒相同。

2、消防盒面板材质依据外召盒面板材质相似。

3、若外召盒选配超出消防盒材质和颜色选项，消防盒材质和颜色与外呼样式近似（例：外呼面板材质为玻璃）。

4、特殊需求，请咨询技术人员。

Description:

1. The installation method of the fire box is the same as that of the HOP.

2. The panel material of fire box is similar to that of HOP.

3. If optional HOP exceeds the material and color of the fire box, the material and color of the fire box are similar to HOP. (Example: The panel material of HOP is plexiglass).

4. If you have special requirements, please consult technical personnel.

残障操纵箱

Handicapped COP

G2120

嵌入式

Embedded

选配


Optional

CEILING DESIGN
吊顶设计


一体式 Integrated




匀光吊顶 Uniform light ceiling

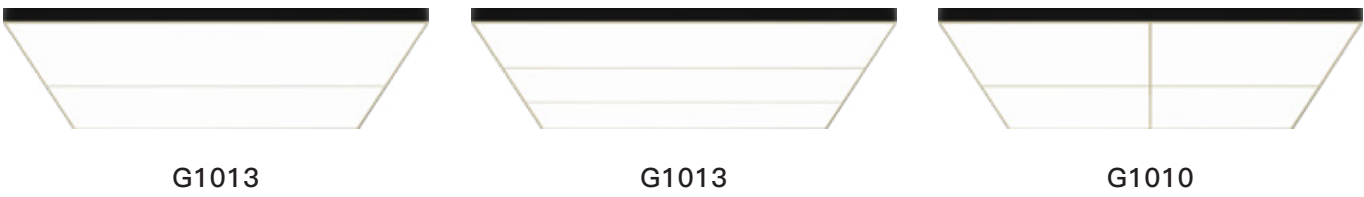


分体式 Split

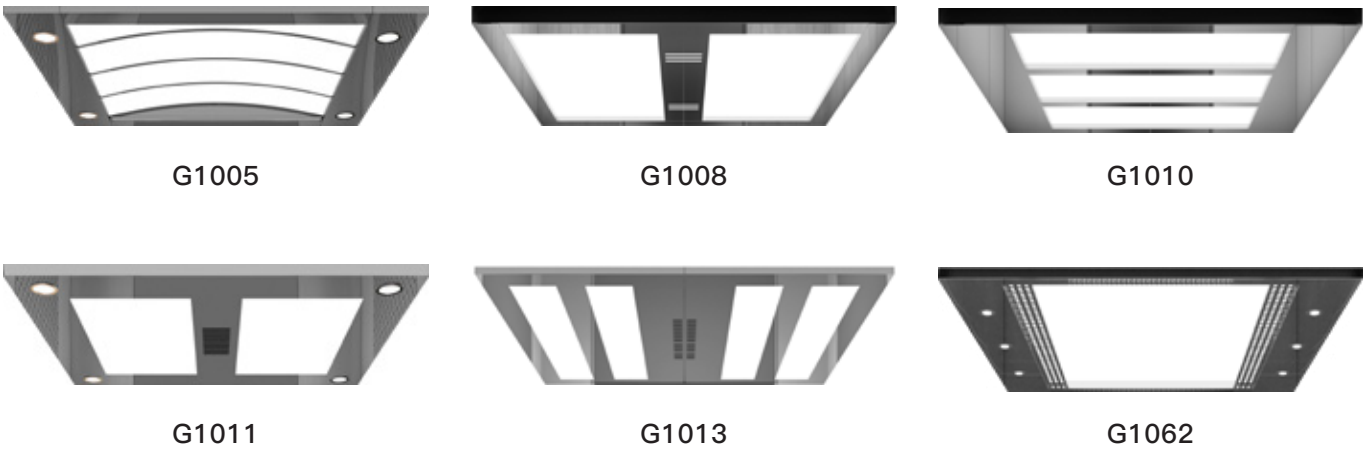

LANDING DOOR DESIGN
厅门设计

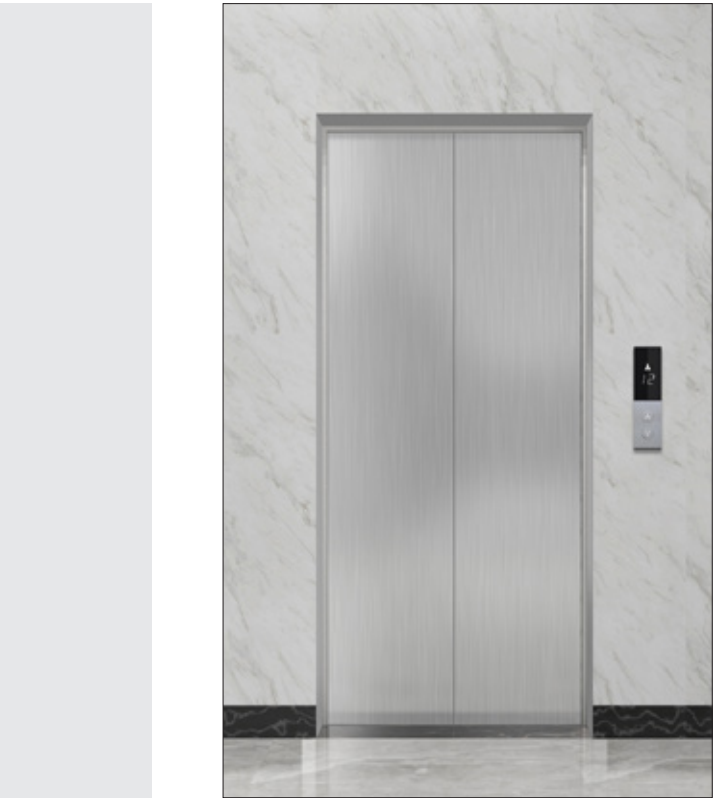

不锈钢 St./St

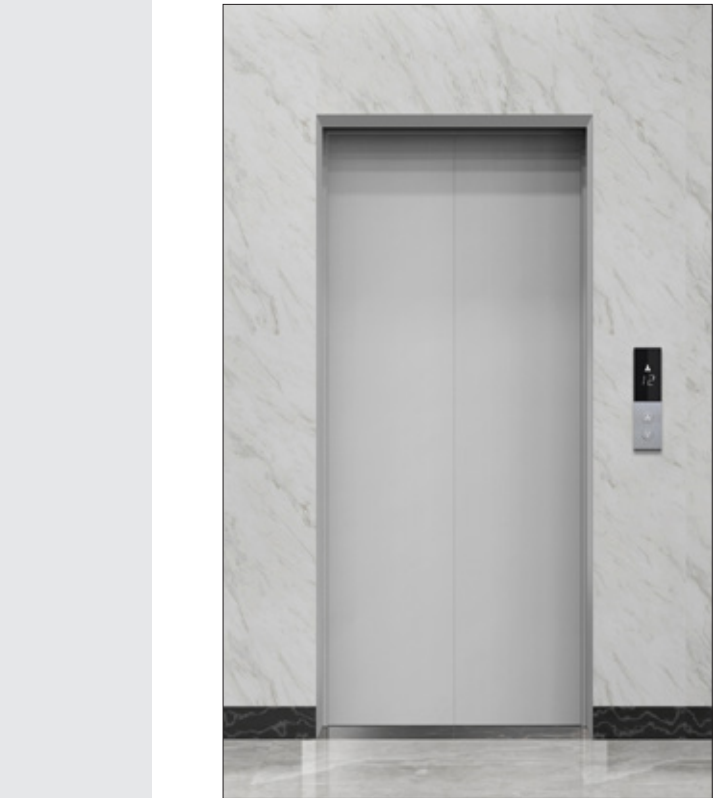

喷塑钢板-玛瑙灰
Powder coating plate (Agate grey)

可选材料及颜色
Materials and colors are available

发纹不锈钢 Hairline St./St.	镜面不锈钢 Mirror St./St.
磨砂不锈钢 Frosted St./St.	黑钛色 Black Titanium
钛金色 Titanium	玫瑰金色 Rose gold
	更多可选材料见 轿壁装饰材料页
香槟金色 Champagne gold	

可选材料及颜色
Materials and colors are available


灰白色 Grey white	淡蓝色 Pale blue
太阳黄 Sun yellow	淡橙 Light orange
	更多可选材料见 轿壁装饰材料页
淡绿色 Pale green	

DECORATION OPTION

装饰选项


轿壁 Cabin wall

不锈钢板 Stainless steel

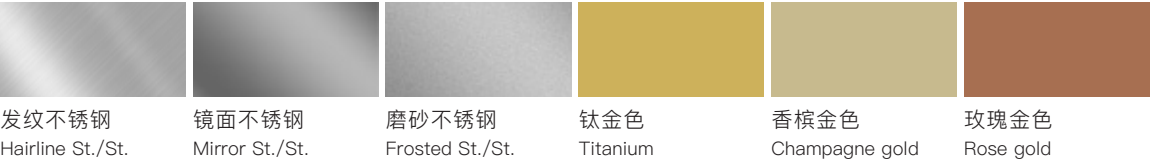

喷塑钢板 Powder coating plate

喷塑砂纹钢板 Powder coating frosted plate

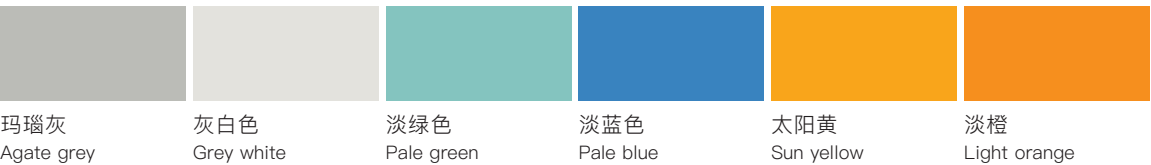

3D打印钢板 3D printed plate


肤感系列 Skin series




木纹系列 Wood texture series



金属拉丝系列 Metal hairline series

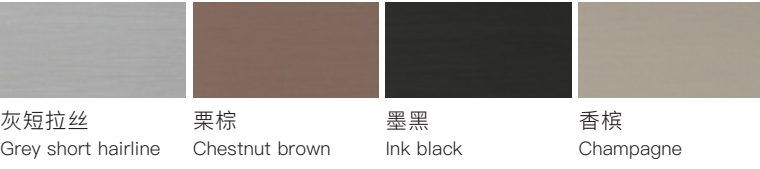

蚀刻图案 Etching pattern

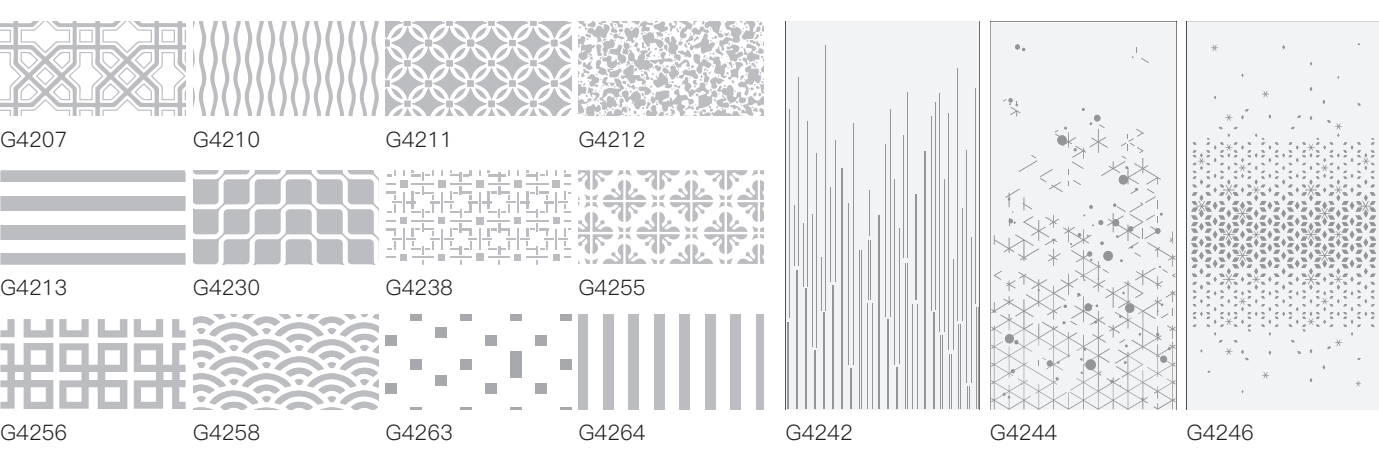

DECORATION OPTION

装饰选项

地板 Floor


石塑地板 SPC floor




PVC



大理石 Marble

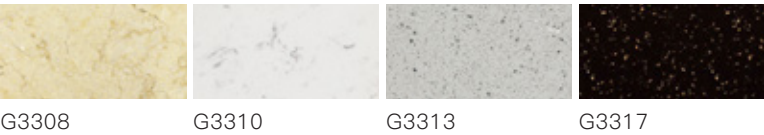

拼花大理石 Marble Mosaic

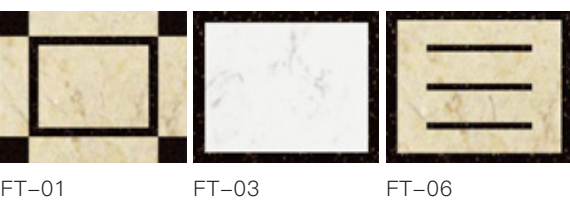

扶手 Handrail




STRETCHER ELEVATOR

担架电梯

Special space design Suitable for stretchers

特殊空间设计 更适合担架出入

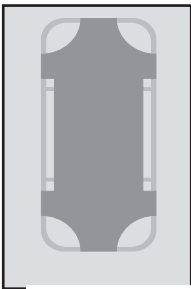

大深度空间设计

侧对重井道布置，注重轿厢深度设计，深度达2100mm，方便救援担架直接出入。

Deep space design
Side CW shaft well layout, focus on car depth design, which can reach 2100mm, convenient for rescue stretcher.

关爱您和他人的安全与健康，巨立与您共同实现社会责任，专为住宅楼及公共场所量身定做了担架电梯，可靠的救援专用系统设计、科学的轿厢空间规划，更加方便在紧急救援时，形成一个无障碍通道快速到达的楼层，保护用户安全。

专用救援系统

直接送达功能：任意楼层启动“救援”功能，电梯将不再接受其他呼梯请求，形成快速专用直达通道，在最短的时间内到达目的楼层，任务完成后系统自动恢复正常使用。
开关门等待功能：专为救援电梯设计的开关门等待系统，紧急救援时，电梯启动开门等待，方便救援，出入安全。

停电应急系统

为完成救援特殊使命，电梯可选配救援专用应急系统，一旦发生停电，应急电源系统启动，电梯就近平层开门，完成救援工作。

国家新版《住宅设计规范》

GB50096 住宅设计标准要求“12层及12层以上的住宅，每栋楼设置电梯不应少于两台，其中一台是可容纳急救担架的电梯”的规定。

Concerned with the safety and health of the people, Joylive stretcher elevator complies with the latest International Building Code (IBC). To protect the user's safety, tailor-made stretcher elevators is made with reliable rescue-specific system design, scientific car space planning, and more convenience in emergency.

DECORATION DESIGN

装潢设计



轿厢 G5292 (标配) Standard Cabin



吊顶 Ceiling

标配 Standard	可选 Optional
发纹不锈钢443 Hairline St./St.	喷塑钢板(玛瑙灰) Powder coating plate (Agate grey)
	喷塑钢板(灰白色) Powder coating plate (Grey white)
G1089	G1094



侧壁/后边壁 Side wall
Back side wall

标配 Standard
发纹不锈钢443 Hairline St./St.



后中壁 Back middle wall

标配 Standard	可选 Optional
镜面不锈钢 Mirror St./St.	发纹不锈钢443 Hairline St./St.



地板 Floor

标配 Standard	可选 Optional
PVC G3121	PVC G3122

备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。

Note：
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.

DECORATION DESIGN
装潢设计

轿厢 G5289 (选配) Optional Cabin



吊顶 Ceiling

标配 Standard	可选 Optional
发纹不锈钢304 Hairline St./St.	喷塑钢板(玛瑙灰) Powder coating plate (Agate grey)
	喷塑钢板(灰白色) Powder coating plate (Grey white)
G1094	G1089

侧壁/后边壁 Side wall
Back side wall

标配 Standard	
发纹不锈钢304 Hairline St./St.	

后中壁 Back middle wall

标配 Standard	可选 Optional
镜面不锈钢 Mirror St./St.	发纹不锈钢304 Hairline St./St.

地板 Floor

标配 Standard	可选 Optional
PVC G3121	PVC G3122

备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。

Note：
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.

DECORATION DESIGN
装潢设计

轿厢 G5287 (选配) Optional Cabin



吊顶 Ceiling

标配 Standard	可选 Optional
发纹不锈钢304 Hairline St./St.	喷塑钢板(玛瑙灰) Powder coating plate (Agate grey)
	喷塑钢板(灰白色) Powder coating plate (Grey white)
G1094	G1089

侧壁/后边壁 Side wall
Back side wall

标配 Standard	可选 Optional
化妆钢板 G4441 Decorating plate	化妆钢板 G4445 Decorating plate

后中壁 Back middle wall

	化妆钢板 G4450 Decorating plate

后中壁 Back middle wall

标配 Standard	
镜面不锈钢 Mirror St./St.	

地板 Floor

标配 Standard	可选 Optional
PVC G3121	PVC G3122

备注：
本手册所展示的轿厢及选项配置仅供参考，所示样品与实物的色彩和材质可能会有偏差，以实物为准。

Note：
The color and material shown in this manual are for reference only. The color and material of these sample might be different from the real object.

APPLICATION RANGE

适用范围

3100(GP30)

SMR

小机房

Speed	Max. travel	Max. stop	Suggest stop	Capacity						
额定速度	最大提升高度	最大层站数	建议层站数	额定载重 kg						
m/s	m			630	800(825)	1000(1050)	1150	1250	1350	1600
1.0	50	18	≤13							
1.5	75	28	≤20							
1.75	90	32	≤25							
2.0	100	35	≤28							

3300S(GP30)

SMR

小机房

Speed	Max. travel	Max. stop	Suggest stop	Capacity		
额定速度	最大提升高度	最大层站数	建议层站数	额定载重 kg		
m/s	m			630	800(825)	1000(1050)
1.0	40	15	≤13			
1.5	60	21	≤20			
1.75	80	26	≤26			

3200(GPN30)

MRL

无机房

Speed	Max. travel	Max. stop	Suggest stop	Capacity						
额定速度	最大提升高度	最大层站数	建议层站数	额定载重 kg						
m/s	m			630	800(825)	1000(1050)	1150	1250	1350	1600
1.0	40	14	≤11							
1.5	55	20	≤15							
1.75	70	25	≤19							

3300N(GPN30)

MRL

无机房

Speed	Max. travel	Max. stop	Suggest stop	Capacity		
额定速度	最大提升高度	最大层站数	建议层站数	额定载重 kg		
m/s	m			630	800(825)	1000(1050)
1.0	40	15	≤13			
1.5	60	21	≤20			
1.75	70	23	≤23			

3600(GP30)

SMR

小机房

Speed	Max. travel	Max. stop	Suggest stop	Capacity			
额定速度	最大提升高度	最大层站数	建议层站数	额定载重 kg			
m/s	m			800(825)	1000(1050)	1150	1250 1350
2.0	100	36	≤28				
2.5	125	42	≤35				

说明：(1). 阴影部分为可提供的范围。
(2). 若用户所需的额定载重系列不在本产品标准载重系列中且小于最大额定载重时，需按最接近的大一档额定载荷配置。

Description:(1).The shaded section is the provided range
(2). If the rated load series required by the user is not in the standard load series of this product and is less than max.load, it must be configured according to the nearest large rated load.

标配功能

全集选控制	开门时间设定	逆向运行保护	自动校正轿厢位置	夜间保安层
检修运行	提前关门	编码器故障保护	照明风扇节能功能	司机操作运行
紧急电动运行	强迫关门	电机过电流保护	五方通话	司机换向
最佳曲线自动生成	光幕保护	电源过电压保护	语音报站、安抚	前后门独立控制
直接停靠	光幕故障诊断	电机温升保护	轿厢到站钟	VIP服务
井道自学习	门机过热检测	UCMP功能	错误指令取消	强迫停层
启动转矩自动补偿	换站停靠	门锁短接保护	轿内层楼方向指示	门服务层设定
电机参数调谐	自救平层运行	外召按钮粘连识别	层站层楼方向指示	运行次数记录
上电自动开门	满载直行	平层微调	应急照明	运行时间记录
自动关门	超载保护	故障诊断	自动返基站	层楼显示按位设置
本层外召开门	防打滑保护	防捣乱	消防返回	再平层
重复关门	上下限位保护	锁梯功能	用户设定检查	提前开门
重复开门	超速保护	运行状态显示	分时服务	

STANDARD FUNCTION

Collective Selective Control	Overload Protection	False Call Cancellation
Inspection Travel	Anti-slip Protection	Car Inside Floor Direction Indicator
Emergency Electric Operation	Up and Down Limit Protection	Landing Door Floor Direction Indicator
Best Curve Autogeneration	Overspeed Protection	Emergency Light
Direct Stop	Inverted Running	Automatic Return Main Floor
Shaft Learning	Encoder Failure Protection	Fire Emergency Return
Starting torque automatic compensation	Motor Overcurrent Protection	User Inspection Set
Motor parameter tuning	Power Overcurrent Protection	Time-sharing
Up Automatic Opening Door Operator	Motor Temperature Rise Protection	Security Floor Nighttime
Automatic Closing Door Operator	UCMP	Driver Operation
Landing Call	Door Lock Short Cut Protection	Attendant Reversal
Closing Door Repetition	Call Button	Front and Back Door Independent Control
Opening Door Repetition	Level Fine Adjustment	VIP Service
Door-open Time Set	Fault Diagnosis	Forced Stop
Advance Door Closing	Anti- nuisance Device	Service Floor Set
Nudging Run	Elevator Lock	Mileage Recorder
Light Curtain Protection	Running Status Display	Time Recorder
Light Curtain Failure Diagnosis	Car Position Autocorrection	Level Button Position Set
Door Operator Overheat Detection	Lighting Fan Energy-saving Function	Relevel
Exchange Stop	Five Parties Call	Pre-opening
Self-rescue Levelling Operation	Voice Announcement	
Car Full Direct Running	Car Passing Chime	

特殊功能

电动松闸（3200/3300N标配）	消防员运行	轿内摄像
停电救援	无障碍功能	副操纵箱
IC卡控制	群控运行	上下班高峰服务
有线远程监控	并联控制	流媒体显示屏
无线远程监控	地震管理	

OPTIONAL FUNCTION

Electric loose brake (3200/3300N standard)	Wireless Remote Monitoring	Earthquake Protection
Power Failure Rescue	Fireman operation	Car Inside Camera
IC Card Control	Physical Disabilities Care	Secondary Operation Box
Cable Remote Monitoring	Group Automatic Operation	Traffic Peak
	Parallel Control	Streaming Media Screen

LAYOUT PLAN & PARAMETER

土建布置图 / 参数表

3100 (GP30) SMR

额定载重 Load	额定速度 Speed	轿厢尺寸 Ca bin Size	开门尺寸 Door Opening	对重布置 C.W.layout	开门形式 Door type	标准井道尺寸 Hoistway/Shaft	标准底坑净深 Pit depth	标准顶层净高 Overhead
kg	m/s	CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
630	1	1100 × 1400	800 × 2100	后对重 C.W. at rear	中分 CO	1900 × 1700	1350	4400
	1.5						1350	4450
	1.75						1350	4500
630	1	1100 × 1400	800 × 2100	侧对重 C.W. at side	中分（贯通） CO/Doulbe	2000 × 1900	1350	4400
	1.5						1350	4450
	1.75						1350	4500
800 (825)	1	1400 × 1350	800 × 2100	后对重 C.W. at rear	中分 CO	1900 × 1950	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	4800
800 (825)	1	1350 × 1400	800 × 2100	侧对重 C.W. at side	中分（贯通） CO/Doulbe	2200 × 1900	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	5000
1000	1	1600 × 1400	900 × 2100	后对重 C.W. at rear	中分 CO	2100 × 2000	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	4800
1000	1	1400 × 1600	900 × 2100	侧对重 C.W. at side	中分（贯通） CO/Doulbe	2300 × 2100	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	5000
1050	1	1600 × 1500	900 × 2100	后对重 C.W. at rear	中分 CO	2100 × 2100	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	4800
1050	1	1500 × 1600	900 × 2100	侧对重 C.W. at side	中分（贯通） CO/Doulbe	2300 × 2100	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	5000
1000 (1050) (担架梯)	1	1100 × 2100	900 × 2100	侧对重 C.W. at side	旁开 SO	1850 × 2550	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	4800
1000 (1050) (担架梯)	1	1100 × 2100	900 × 2100	侧对重 C.W. at side	中分 CO	2050 × 2500	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	4800
1150	1	1800 × 1400	1000 × 2100	后对重 C.W. at rear	中分 CO	2300 × 2100	1350	4400
	1.5						1350	4450
	1.75						1350	4500
	2.0						1600	5000
1250	1	1900 × 1500	1100 × 2100	后对重 C.W. at rear	中分 CO	2400 × 2200	1400	4450
	1.5						1450	4500
	1.75						1450	4600
	2.0						1700	5000
1350	1	1900 × 1600	1100 × 2100	后对重 C.W. at rear	中分 CO	2400 × 2300	1400	4450
	1.5						1450	4500
	1.75						1450	4600
	2.0						1700	5000
1600	1	2000 × 1700	1100 × 2100	后对重 C.W. at rear	中分 CO	2500 × 2450	1400	4450
	1.5						1450	4500
	1.75						1450	4600
	2.0						1700	5000

注：速度2.0m/s，载重1150kg/1250kg/1350kg/1600kg，仅适用于3100小机房乘客电梯。
Note：Speed: 2.0m/s, Load: 1150kg/1250kg/1350kg/1600kg, only for 3100 SMR Passenger Elevator.

3200 (GPN30) MRL

额定载重 Load	额定速度 Speed	轿厢尺寸 Cabin Size	开门尺寸 Door Opening	对重布置 C.W.layout	开门形式 Door type	标准井道尺寸 Hoistway/Shaft	标准底坑净深 Pit depth	标准顶层净高 Overhead
kg	m/s	CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
630	1	1100 × 1400	700 × 2100	侧对重 C.W. at side	中分 CO	1850 × 1850	1500	4250
	1.5						1550	4300
	1.75						1600	4350
630	1	1100 × 1400	700 × 2100	侧对重 C.W. at side	中分（贯通） CO/Doulbe	1850 × 1900	1500	4250
	1.5						1550	4300
	1.75						1600	4350
800 (825)	1	1350 × 1400	800 × 2100	侧对重 C.W. at side	中分 CO	2100 × 1850	1500	4250
	1.5						1550	4300
	1.75						1600	4350
800 (825)	1	1350 × 1400	800 × 2100	侧对重 C.W. at side	中分（贯通） CO/Doulbe	2100 × 1900	1500	4250
	1.5						1550	4300
	1.75						1600	4350
1000	1	1600 × 1400	900 × 2100	侧对重 C.W. at side	中分 CO	2350 × 1850	1500	4250
	1.5						1550	4300
	1.75						1600	4350
1000	1	1400 × 1600	900 × 2100	侧对重 C.W. at side	中分（贯通） CO/Doulbe	2250 × 2100	1500	4250
	1.5						1550	4300
	1.75						1600	4350
1050	1	1600 × 1500	900 × 2100	侧对重 C.W. at side	中分 CO	2350 × 1950	1500	4250
	1.5						1550	4300
	1.75						1600	4350
1050	1	1500 × 1600	900 × 2100	侧对重 C.W. at side	中分（贯通） CO/Doulbe	2250 × 2100	1500	4250
	1.5						1550	4300
	1.75						1600	4350
1000 (1050) (担架梯)	1	1100 × 2100	900 × 2100	侧对重 C.W. at side	旁开 SO	1850 × 2550	1500	4250
	1.5						1550	4300
	1.75						1600	4350
1000 (1050) (担架梯)	1	1100 × 2100	900 × 2100	侧对重 C.W. at side	中分 CO	2100 × 2500	1500	4250
	1.5						1550	4300
	1.75						1600	4350
1150	1	1800 × 1400	1000 × 2100	侧对重 C.W. at side	中分 CO	2700 × 1800	1500	4350
	1.5						1550	4400
	1.75						1600	4450
1250	1	1900 × 1500	1100 × 2100	侧对重 C.W. at side	中分 CO	2800 × 1900	1500	4350
	1.5						1550	4450
	1.75						1600	4500
1350	1	1900 × 1600	1100 × 2100	侧对重 C.W. at side	中分 CO	2800 × 2000	1500	4350
	1.5						1550	4450
	1.75						1600	4500
1600	1	2000 × 1700	1100 × 2100	侧对重 C.W. at side	中分 CO	2900 × 2100	1500	4350
	1.5						1550	4450
	1.75						1600	4500

3600 (GP30) SMR


额定载重 Load	额定速度 Speed	轿厢尺寸 Cabin Size	开门尺寸 Door Opening	开门数量 Entrance	开门形式 Door type	标准井道尺寸 Hoistway/Shaft	标准底坑深 Pit depth	标准顶层净高 Overhead
kg	m/s	CW × CD	EW × EH			HW × HD	PD(mm)	TH(mm)
800 (825)	2	1400 × 1350	800 × 2100	单开门 Single	中分 CO	2000 × 2050	1600	4700
	2.5						1800	4950
1000	2	1600 × 1400	900 × 2100	单开门 Single	中分 CO	2200 × 2100	1600	4700
	2.5						1800	4950
1050	2	1600 × 1500	900 × 2100	单开门 Single	中分 CO	2200 × 2200	1600	4700
	2.5						1800	4950
1150	2	1800 × 1400	1000 × 2100	单开门 Single	中分 CO	2400 × 2200	1600	4700
	2.5						1900	4950
1250	2	1900 × 1500	1100 × 2100	单开门 Single	中分 CO	2500 × 2300	1700	4700
	2.5						1900	4950
1350	2	1900 × 1600	1100 × 2100	单开门 Single	中分 CO	2500 × 2400	1700	4700
	2.5						1900	4950

LAYOUT PLAN & PARAMETER


土建布置图 / 参数表

3300S (GP30) SMR


额定 载重 Load	额定 速度 Speed	轿厢尺寸 Cabin Size	开门尺寸 Door Opening	对重 布置 C.W.layout	开门 形式 Door type	标准井道 尺寸 Hoistway/Shaft	标准底坑 净深 Pit depth	标准顶层 净高 Overhead
kg	m/s	CW×CD	EW×EH			HW×HD	PD(mm)	TH(mm)
630	1	1400×1100	800×2100	后对重 C.W. at rear	中分 CO	1900×1700	1350	4400
	1.5						1350	4450
	1.75						1350	4500
630	1	1100×1400	800×2100	侧对重 C.W. at side	中分 (贯通) CO/Doulbe	2050×1900	1350	4400
	1.5						1350	4450
	1.75						1350	4500
800 (825)	1	1400×1350	800×2100	后对重 C.W. at rear	中分 CO	1900×1950	1350	4400
	1.5						1350	4450
	1.75						1350	4500
800 (825)	1	1350×1400	800×2100	侧对重 C.W. at side	中分 (贯通) CO/Doulbe	2200×1900	1350	4400
	1.5						1350	4450
	1.75						1350	4500
1000	1	1600×1400	900×2100	后对重 C.W. at rear	中分 CO	2100×2000	1350	4400
	1.5						1350	4450
	1.75						1350	4500
1000	1	1400×1600	900×2100	侧对重 C.W. at side	中分 (贯通) CO/Doulbe	2300×2100	1350	4400
	1.5						1350	4450
	1.75						1350	4500
1050	1	1600×1500	900×2100	后对重 C.W. at rear	中分 CO	2100×2100	1350	4400
	1.5						1350	4450
	1.75						1350	4500
1050	1	1500×1600	900×2100	侧对重 C.W. at side	中分 (贯通) CO/Doulbe	2350×2100	1350	4400
	1.5						1350	4450
	1.75						1350	4500
1000 (1050) (担架梯)	1	1100×2100	900×2100	侧对重 C.W. at side	旁开 SO	1900×2550	1350	4400
	1.5						1350	4450
	1.75						1350	4500
1000 (1050) (担架梯)	1	1100×2100	900×2100	侧对重 C.W. at side	中分 CO	2100×2500	1350	4400
	1.5						1350	4450
	1.75						1350	4500

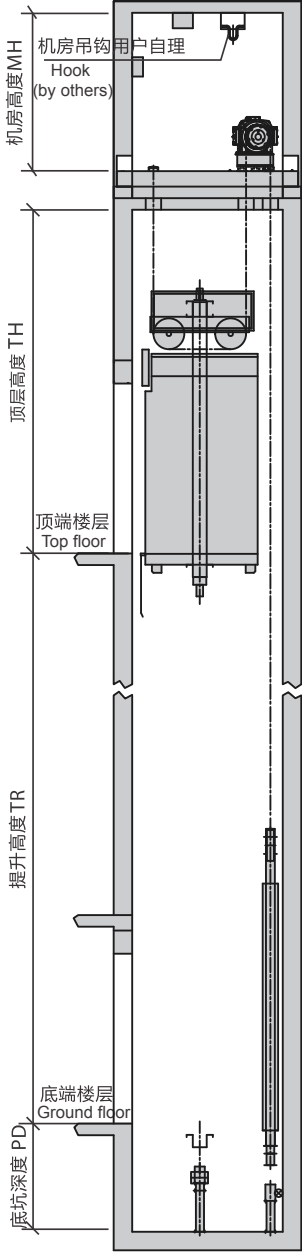

井道立面图
Shaft Vertical Section

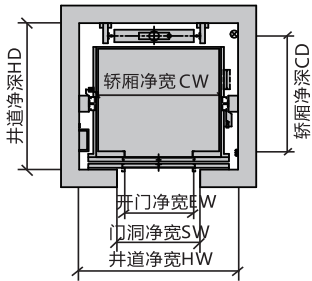


井道平面图
Shaft Plane

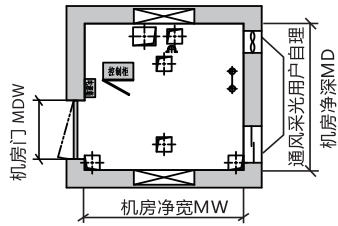


机房平面图
Machine Room Plane

3300N (GPN30) MRL


额定 载重 Load	额定 速度 Speed	轿厢尺寸 Cabin Size	开门尺寸 Door Opening	对重 布置 C.W.layout	开门 形式 Door type	标准井道 尺寸 Hoistway/Shaft	标准底坑 净深 Pit depth	标准顶层 净高 Overhead
kg	m/s	CW×CD	EW×EH			HW×HD	PD(mm)	TH(mm)
630	1	1100×1400	700×2100	侧对重 C.W. at side	中分 CO	1850×1850	1500	4350
	1.5						1500	4400
	1.75						1550	4450
630	1	1100×1400	700×2100	侧对重 C.W. at side	中分 (贯通) CO/Doulbe	1850×1900	1500	4350
	1.5						1500	4400
	1.75						1550	4450
800 (825)	1	1350×1400	800×2100	侧对重 C.W. at side	中分 CO	2100×1850	1500	4350
	1.5						1500	4400
	1.75						1550	4450
800 (825)	1	1350×1400	800×2100	侧对重 C.W. at side	中分 (贯通) CO/Doulbe	2100×1900	1500	4350
	1.5						1500	4400
	1.75						1550	4450
1000	1	1600×1400	900×2100	侧对重 C.W. at side	中分 CO	2350×1850	1500	4350
	1.5						1500	4400
	1.75						1550	4450
1000	1	1400×1600	900×2100	侧对重 C.W. at side	中分 (贯通) CO/Doulbe	2200×2100	1500	4350
	1.5						1500	4400
	1.75						1550	4450
1050	1	1600×1500	900×2100	侧对重 C.W. at side	中分 CO	2350×1950	1500	4350
	1.5						1500	4400
	1.75						1550	4450
1050	1	1500×1600	900×2100	侧对重 C.W. at side	中分 (贯通) CO/Doulbe	2300×2100	1500	4350
	1.5						1500	4400
	1.75						1550	4450
1000 (1050) (担架梯)	1	1100×2100	900×2100	侧对重 C.W. at side	旁开 SO	1850×2550	1500	4350
	1.5						1500	4400
	1.75						1550	4450
1000 (1050) (担架梯)	1	1100×2100	900×2100	侧对重 C.W. at side	中分 CO	2100×2500	1500	4350
	1.5						1500	4400
	1.75						1550	4450

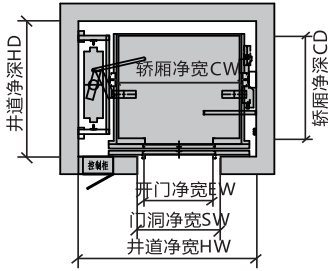

井道平面图
Shaft Plane

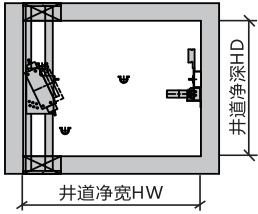

顶层平面图
Top Floor Plane

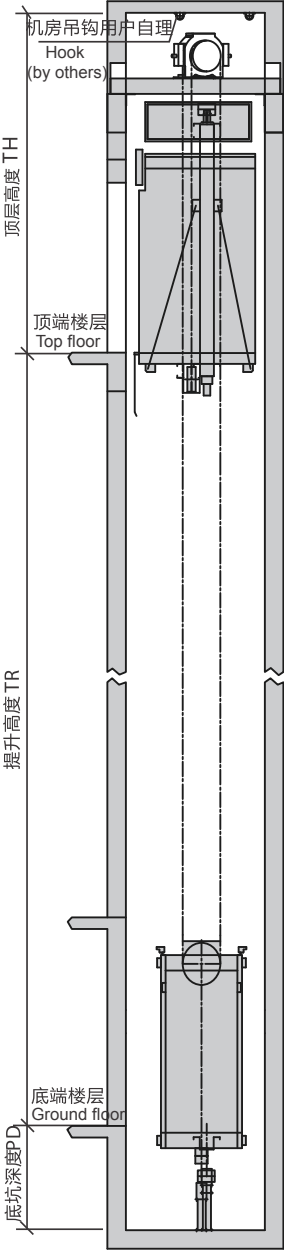

井道立面图
Shaft Vertical Section

注：以上为标准土建参数，如需了解更多详情，请与我司当地分支机构联系。
Note: Above are standard civil construction parameters. For more details, please contact Joylive local branch.